



GATEWAY INSTALL INSTRUCTIONS



DSL

For Gateway models VMG4927 & VMG4825

1 Connect the new Gateway



- Using the gray DSL cable provided, plug one end into a wall jack and the other end into the port labeled DSL on the Gateway.

2 Connect the power supply

- Plug the new power supply into the Gateway, then plug the other end into an electrical outlet.
- After plugging in the Gateway, wait for it to connect to the network (indicated by a GREEN light next to the ) before proceeding to the next step.
- If the network light does not turn green after 2 minutes, try another jack. Repeat the above steps until the network  icon turns GREEN.


3 Connecting to totalWifi™

- To connect to WiFi use the WiFi Network Name (SSID) and WiFi password that are printed on the device label.

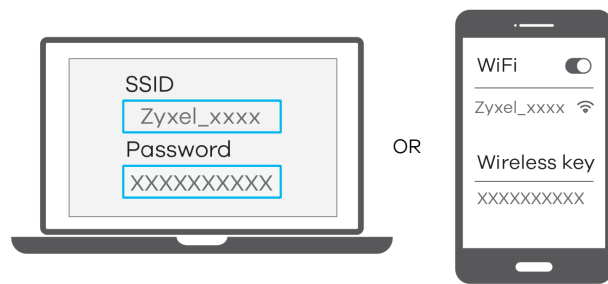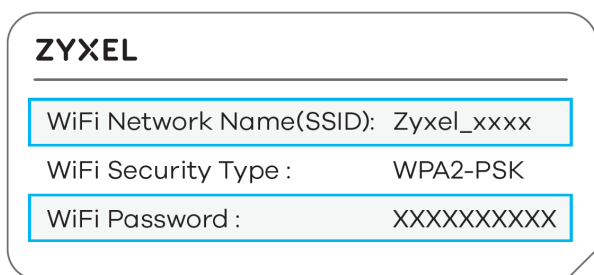


DSL Wiring Diagram

For Gateway models VMG4927 & VMG4825

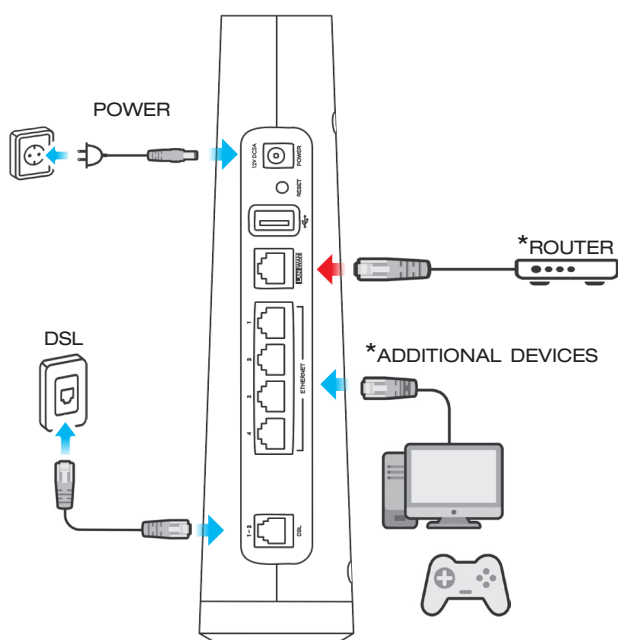


Fiber Wiring Diagram

For Gateway model EMG6726

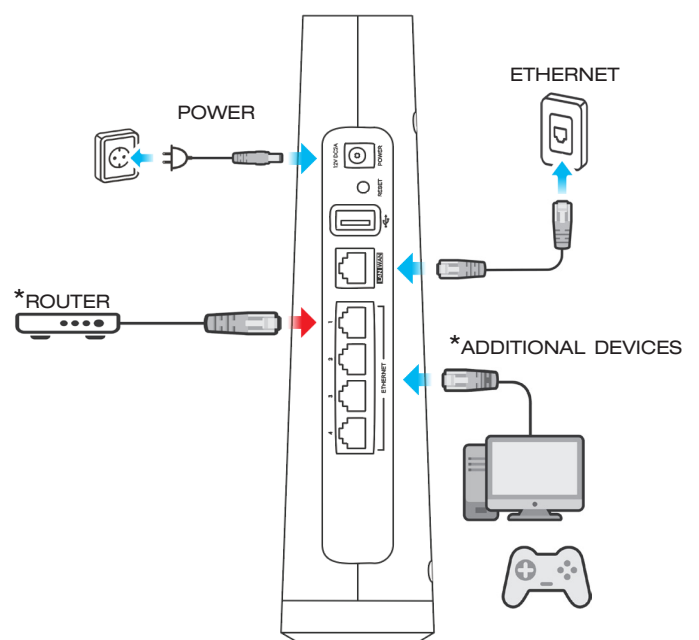

***Additional devices** - Devices such as TV's, computers, or gaming consoles can be plugged directly into the gateway.

***Router (if not using totalWifi™)** - totalWifi™ is turned on by default. If you have requested totalWifi™ be turned off, you can plug your own router into the port labeled WAN (DSL) or port #1 (Fiber) as indicated by  in the wiring diagram.